



CONDENSATE OUTLET 1/2"
CONDENSATE OUTLET 1/2"

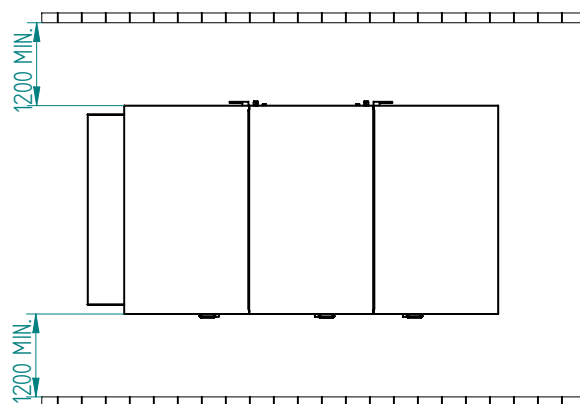

HPX POSITION			
model HPX 060 T		code H06000000005	
CONSTRUCTIVE FEATURINGS			
frame <i>DOUBLE VANE 40mm ALUMINIUM PROFILE</i>			
panels <i>SANDWICH PANELS thick.42mm</i> <i>outside precoated inside galvanized sheet metal</i>			
baseframe <i>ALUMINIUM PROFILE</i>			
drain train <i>INOX</i>			
SUPPLY FAN			
model:	AT 12-12 S	flow rate:	6000 mc/h
T.S.P.	630 Pa	ESP.	250 Pa
motor	2.2kW 4poles IP55	voltage	380/3/50 V/ph/Hz
		pulley	1 SPA 112
			RPM 1280
		pulley	1 VAR 139
			belt type: SPA932
RETURN FAN			
model:	AT 12-12 S	flow rate:	6000 mc/h
T.S.P.	630 Pa	ESP.	250 Pa
motor	2.2kW 4poles IP55	voltage	380/3/50 V/ph/Hz
		pulley	1 SPA 112
			RPM 1280
		pulley	1 VAR 139
			belt type: SPA932
recuperator mod. <i>BI AL 06 N 111 L T SC</i>			
RIGID BAG FILTER			
model:	595X595X292	class:	F7
		n°:	4
SYNTHETIC CELL FILTER			
model:	595x595x98 mm	class:	G4
		n°:	4

Disegnato	Data	Approvato	Data	Tolleranze generali di lavorazione non quotate UNI-ISO 2768m	Scala	UNI A3
Sturaro E.	29/11/2006				1:40	⚠
				Denominazione		
				HPX 060 T R. VI004013-031608		
				Codice disegno	Rev.	
				H06000000005	0	